

Instructions for wear checks of play equipment

The equipment must be checked for correct operation and safety, especially the points listed below:

Proof of maintenance

Playground.....

Date of installation

Checks depend on the type of equipment. Any equipment with moving parts must be checked at least twice a year, static equipment at least once a year.



Intervals for maintenance work and checks generally depend on

- location
- usage
- frequency of use
- possible vandalism

For more details see also "General instructions for maintenance of playgrounds".

Pedal Pump stainless steel with sprayhead inside the handlebar

Order No. 5.18130

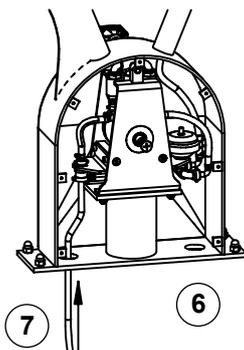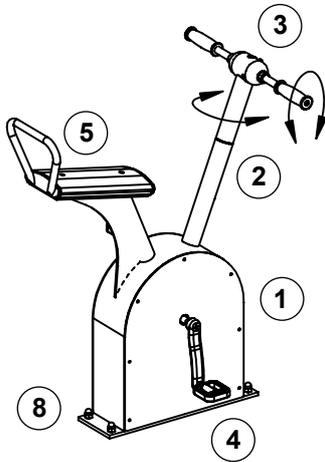

Operation

1. Carry out an operational test to ensure the pump mechanism moves smoothly.
2. Turn handlebar and grip to ensure they move smoothly.
3. Check the sprayhead inside the handlebar for proper operation and clean if necessary.
4. Ensure that cranks and pedals are securely connected and check for proper operation.
5. Check saddle for wear and tear and ensure it is securely connected.

Water supply

6. Check hoses for wear and tear, replace if necessary after removing the service lid (located on the side) and the crank.
7. Check water supply for wear and tear, and clean the suction filter if necessary.

Structural stability

8. Check anchoring to the ground once a year, retighten screws and bolts if necessary.

Note

Prior to the start of the frost period, turn off water supply and drain the lines, dismantle the pedal pump and drain the water container if necessary. If the pedal pump has been removed, you can close the opening using the included winter lid.

Repair not carried out, it is still possible to play on equipment

Repair not carried out, equipment is taken out of action

All work carried out, everything is in order

Maintenance carried out by:

..... Date

Special notes, e.g. for repairs